



**UV-LED / UV  
interchangeable**

**LED / UV**

## UVAPRINT varyCURE AC

One housing, one electronic power supply  
– two inserts

Powerful curing system working with  
conventional UV or UV-LED technology

Air cooled

### System-Features

- Powerful cassette system with UV-LED or UV lamp insert
- Electronic power supply varyPOWER compatible with both technologies
- Intelligent system control

### Advantages

- Flexible exchange of LED and UV module
- Easy handling
- Highest energy efficiency
- Automatic adjustment of all system properties

# UVAPRINT varyCURE AC

**UVAPRINT varyCURE AC** is based on a cassette technology: Either an UV lamp insert or an UV-LED insert can be slid in the same robust housing very easily. Power connection and cabling remain unchanged as the joint electronic ballast **EPSA varyPOWER** supplies both inserts by immediately recognizing what technology is used and thus switches from square-waved AC (conventional UV) to DC (UV-LED).

An intelligent control adjusts all system-relevant settings automatically, this means for the user: Just swap and cure.

## UV lamp insert

The UV spectrum of **UVAPRINT varyCURE AC** can be perfectly adjusted to the applied ink or varnish by easily exchanging the UV lamp per plug-in base.

- optimized reflector geometrics
- dichroitic reflector coating for temperature sensitive substrates
- specific lamp output up to 160 W/cm
- arc length depends on application



## UV-LED insert


The LED insert of **UVAPRINT varyCURE AC** is available in the wavelengths **365/385/395/405 nm +/- 10 nm**. Thus, the wavelength can be perfectly adapted to the particular application.

A highly efficient driver integrated in the housing allows that each LED segment is operated and monitored separately.

LED service life	> 20.000 hours*			
dimensions / housing in mm (W x H)	124 x 117 length application dependent			
height / light aperture	20 mm 40 mm			
wavelengths in nm	20 mm version:	385	395	405
typical intensity in mW/cm <sup>2</sup> **	25.000	25.000	25.000	
wavelengths in nm	40 mm version:	385	395	405
typical intensity in mW/cm <sup>2</sup> **	16.000	16.000	16.000	
cooling	air cooling			

\* typical lifetime under specified operating conditions

\*\* measured with Hönle UV meter with LED sensor

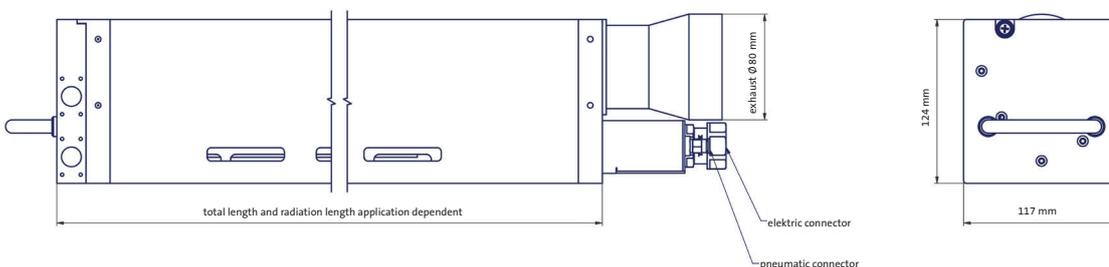

Dr. Hönle AG UV Technology, Nicolaus-Otto-Str. 2, 82205 Gilching, Germany  
Phone: +49 49 8105 2083-0, Fax: +49 8105 2083-148. [www.hoenle.de](http://www.hoenle.de)

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data. © Copyright Dr. Hönle AG. Updated 05/22